

ROTATION KIT BENEFITS:

Allows one Puroflux filtration unit to clean up to four separate tower basins.

Reduce filtration unit size and cost.

CONTROL PANEL FEATURES:

Panel and Actuator/Valve Assemblies are powered via 120 Volt AC input.


Panel Includes:

Outdoor rated Type 4X Polycarbonate Enclosure with clear cover.

Full-function programmable logic controller with built-in high resolution, full color touchscreen.

Pre-engineered software with field selectable options for 2, 3, or 4 cell control.

Field adjustable parameters for number of cells, rotation time, and cell offline lockout.

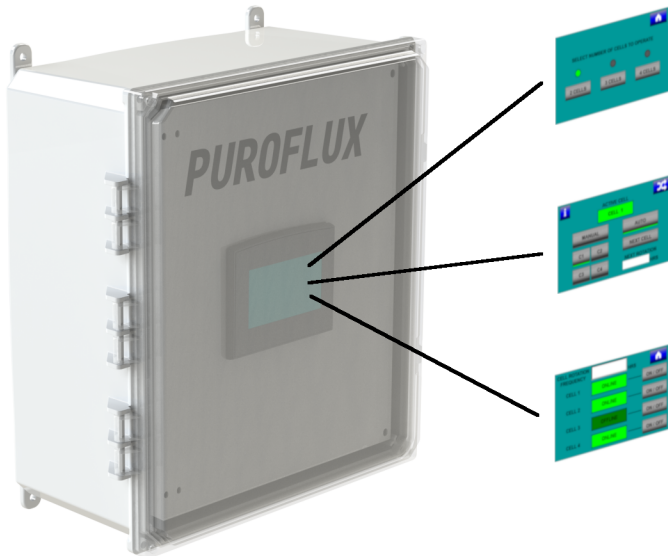

ACTUATOR/VALVE ASSEMBLIES:

Electric actuator with techno-polymer material.

Actuator sizing matched to valve size.


Actuator directly mounted to valve body.


ANSI 150 butterfly valves.

Epoxy coated ductile iron lug body with stainless steel disc.

EPDM resilient seat.

Full port sizes.

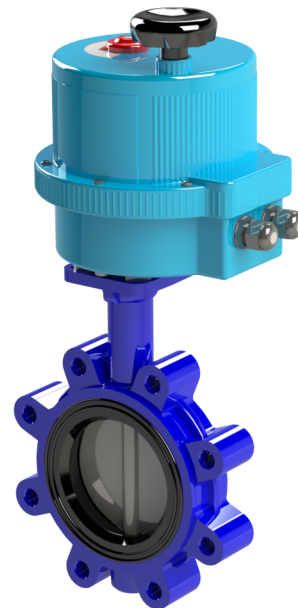

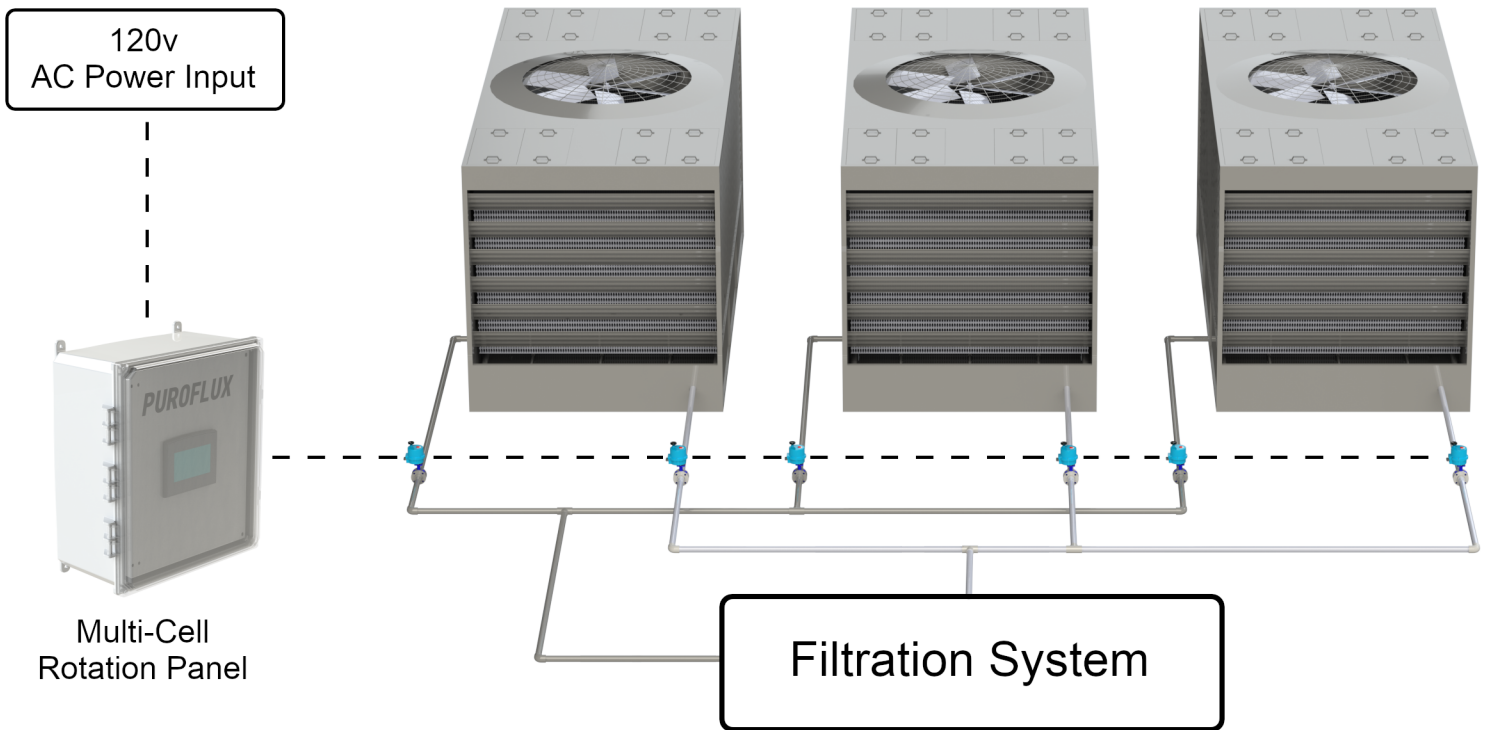

COMPATIBLE WITH ALL PUROFLUX FILTRATION PRODUCTS:



PF-20/30 Series



PF-63 Series



PF-64 Series