


## PF-64-012-AP PUMP PACKAGE SYSTEM SPECIFICATION SHEET

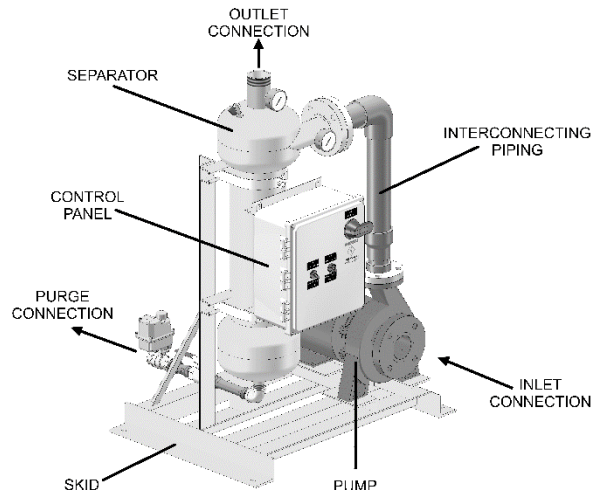

### Features:

- Removes particulate 25 microns and finer
- 150 psi working pressure
- Fully assembled skid package
- One year limited warranty

### Options:

- Manual purge
- Removable dome separator
- 22-1/2° Profile separator
- Coated carbon steel piping
- Isolation valve kit

## SYSTEM COMPONENTS

SPECIFICATIONS	PF-64-012-AP
Flow Rate	50 GPM
System Inlet Connection	2" flange
System Outlet Connection	1-1/4" mpt
Purge Connection	1" fpt
Separator Model	PF-61-012
Separator Purge	Automatic
Pump Motor	2 HP
Volume	2 GAL
Est. Weight, Dry	314 lbs
Est. Weight, Operating	330 lbs

### Separator :

- PF-61 Series separator
- Fusion-bond polyester coated vessel
- Manual air bleed valve
- Inlet/Outlet pressure gauges

### Pump :

- Centrifugal pump
- TEFC motor

### Skid :

- Fusion-bond polyester coated carbon steel

### Interconnecting Pipe :

- Sch.80 PVC piping

### Electrical Controls :





- UL labeled control panel
- Door disconnect switch
- Motor starter with Short-circuit and overload protection
- Local/Off/Remote Switch
- Dry Contact Signals for Pump Status/Trip


### Automatic Purge :

- Electrically actuated ball valve
- Adjustable purge timer
- Purge Isolation Valve

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. DIMENSIONS ARE IN INCHES
  - 2. DIMENSIONS MAY VARY SLIGHTLY - DO NOT USE FOR CONSTRUCTION
  - 3. SEPARATOR SYSTEM IS RATED FOR 150 PSI WORKING PRESSURE

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-			

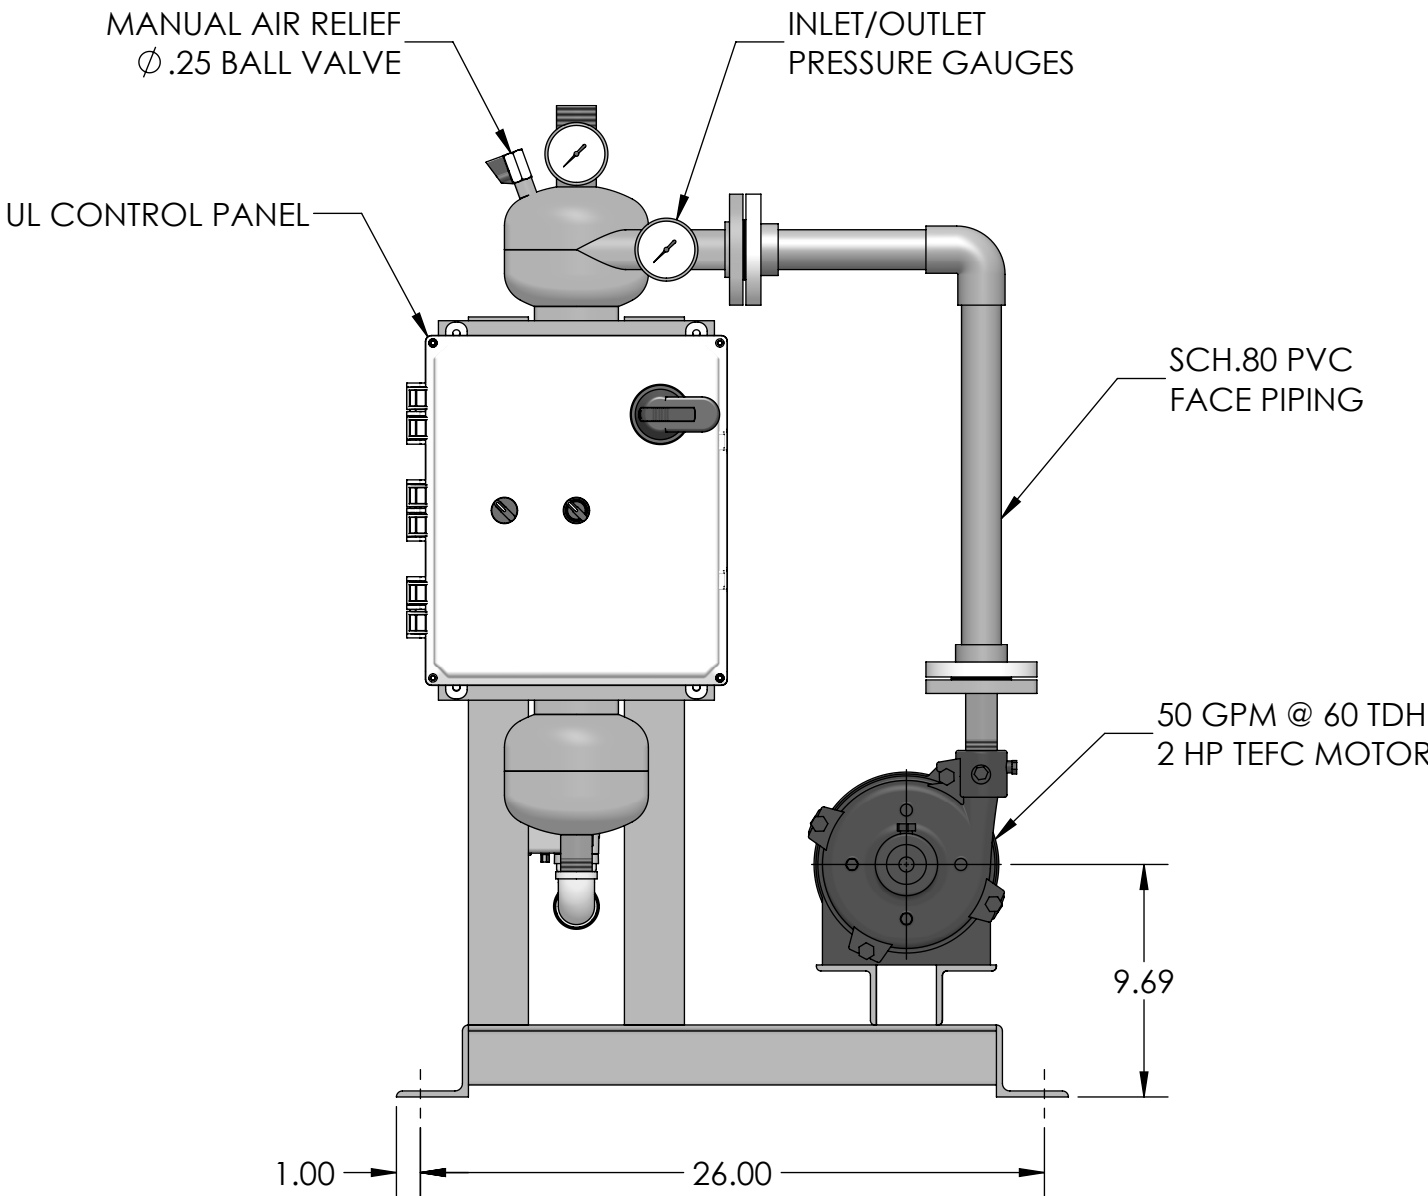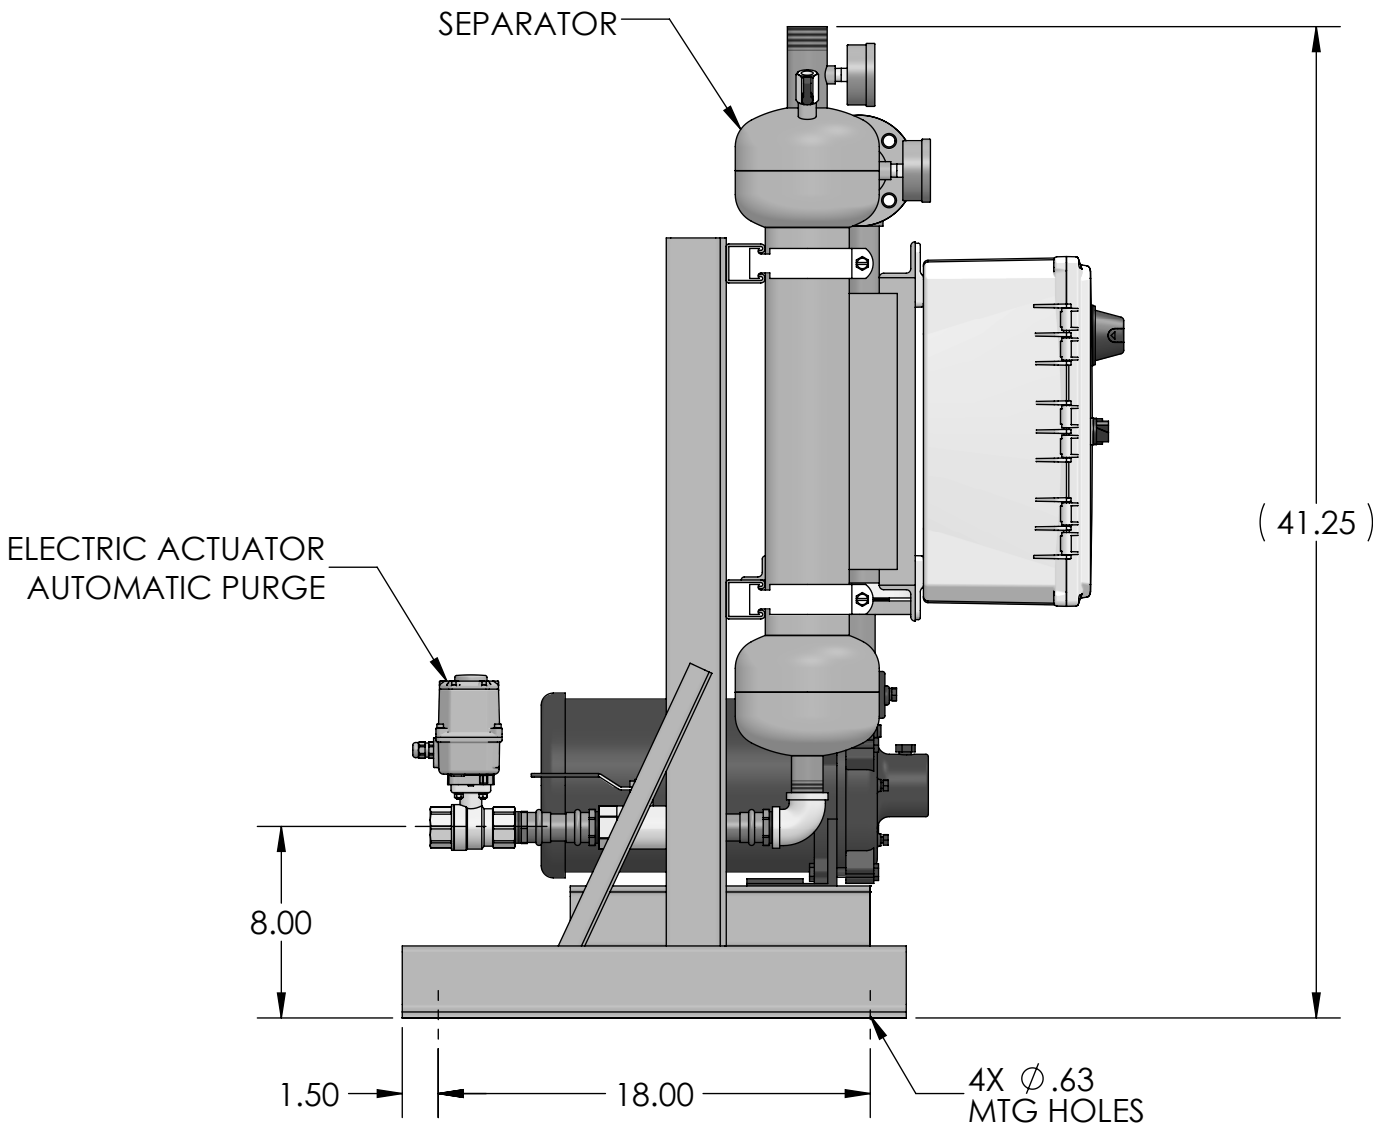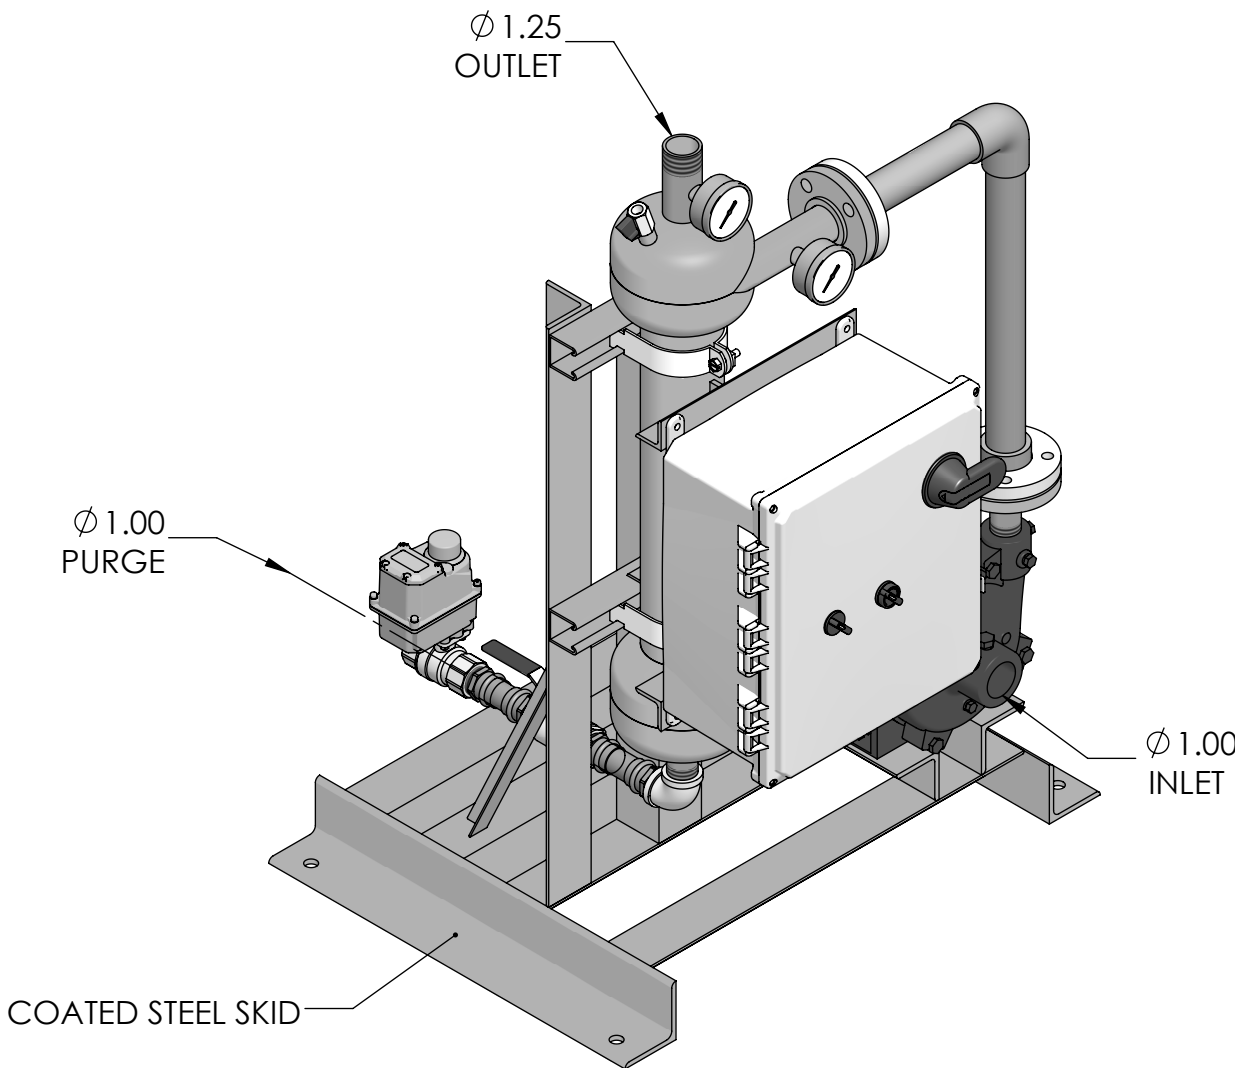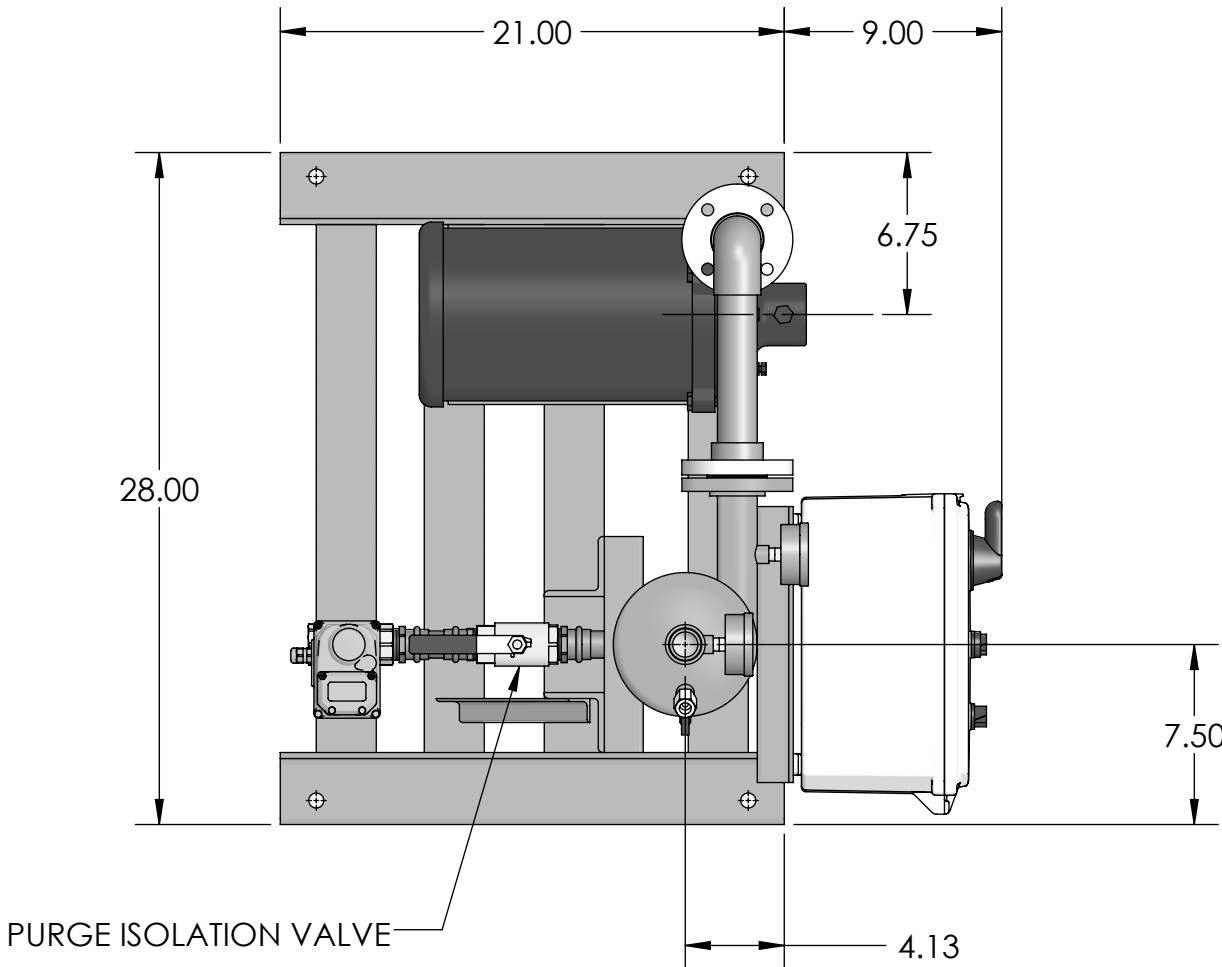

PROPRIETARY AND CONFIDENTIAL	PF-64-012-AP SEPARATOR PACKAGE				 <b>PUROFLUX</b> CORPORATION	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PUROFLUX CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PUROFLUX CORPORATION IS PROHIBITED.	50 GPM - WITH SKID MOUNTED PUMP					
SIZE <b>C</b>	DWG NO.	641-1290		REV	-	
DRAWN	F. LOPEZ	RELEASE DATE	2-26-24	SCALE	NONE	
				WWW.PUROFLUX.COM		SHEET 1 OF 1

4

3

2

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

PUMP MOTOR FULL LOAD AMPS ( 3Ø, 60Hz )				
MOTOR HP	208 VOLTS	230 VOLTS	460 VOLTS	575 VOLTS
1	3.22	2.8	1.4	1.12
2	6.44	5.6	2.8	2.24
3	9.59	8.34	4.17	3.34
5	15.5	13.5	5.76	5.41
7.5	22.4	19.5	9.79	7.81
10	29.2	25.4	12.7	10.1
15	45.1	39.2	19.6	15.7
20	58.9	51.2	25.6	20.5
25	74.5	64.8	32.4	25.9
30	86.9	75.6	37.8	30.2
40	116.0	101.0	50.4	40.3
50	143	130	65	52

FULL LOAD CURRENTS LISTED ABOVE ARE "AVERAGE VALUES" FOR HORSEPOWER RATED MOTORS OF SEVERAL MANUFACTURERS. THE RATED FULL LOAD CURRENT SHOWN ON THE MOTOR NAMEPLATE MAY VARY BY MANUFACTURER.

NOTES
NOTES: UNLESS OTHERWISE SPECIFIED 1. BRANCH CIRCUIT PROTECTION SUPPLIED BY OTHERS 2. PANEL U.L. LISTED AND LABELED 3. DASHED LINES INDICATE FIELD WIRING 4. SWITCH OPERATION "LOCAL" - REMOTE STOP/START OVERRIDE "OFF" - FILTER "OFF" "AUTO" - FILTER ON/OFF VIA REMOTE STOP/STOP
ACTUATOR WARNING !!!!
If the valve does not open or close fully adjust actuator using the instructions provided in the Operations & Maintenance manual.
CAUTION - RISK OF ELECTRICAL SHOCK
More than one disconnect switch may be required to de-energize the equipment before servicing.
WARNING - RISK OF FIRE OR ELECTRIC SHOCK
The opening of the branch circuit protective device may be an indication that a fault current has been interrupted. All current carrying parts and other components protected by this device should be examined and replaced if damaged. If burnout of a current element of an overload relay occurs, the complete overload relay must be replaced.

D

D

C

C


B

B


A

A

## POWER SUPPLY

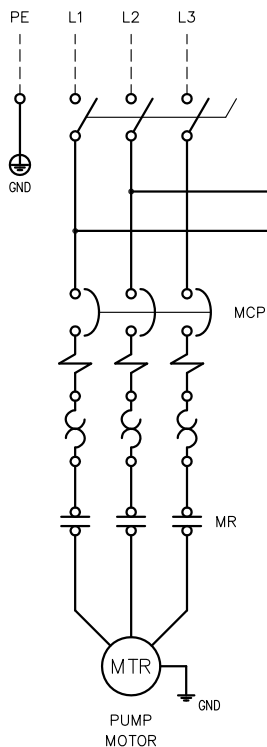
LOCKABLE NON-FUSED  
DISCONNECT SWITCH

## REMOTE DRY CONTACT SIGNALS

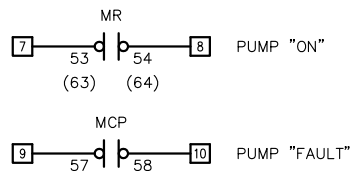


Control panels are built to one specific voltage and may not be field modified to achieve alternate voltages listed below.


ALTERNATE - 208V



ALTERNATE - 230V



ALTERNATE - 575V

PROPRIETARY  
AND CONFIDENTIAL

THE INFORMATION CONTAINED  
IN THIS DRAWING IS THE SOLE  
PROPERTY OF PUROFLUX CORPORATION.  
ANY REPRODUCTION IN PART OR AS  
A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF PUROFLUX CORPORATION  
IS STRICTLY PROHIBITED.

U.L. CONTROL PANEL : PF-64 SERIES  
AUTO PURGE PANEL WITH PUMP HOA

SIZE C DWG NO. UL2-1913  
DRAWN K. CARTER RELEASE DATE 6-03-16 SCALE NONE



WWW.PUROFLUX.COM

SHEET 1 OF 1